

# **AIRTEK® NXT / ROADMAAX™**

## Truck Crane Suspension Solutions



### **AIRTEK® NXT**

Integrated front air suspension and steer axle system designed for comfort and improved performance



### **ROADMAAX™**

Tandem-axle rear air suspension designed for reduced maintenance and driver comfort



To learn more about AIRTEK NXT / ROADMAAX, call 855.743.3733 or visit [www.hendrickson-intl.com](http://www.hendrickson-intl.com)

 **HENDRICKSON**  
*The World Rides On Us®*

## AIRTEK® NXT for Truck Crane Applications

Capacities up to 26,000 lbs. per axle

### Reduced Maintenance

- QUIK-ALIGN® helps reduce maintenance time by offering a fast and easy method to adjust and set alignment without shims

### Weight Savings

- The unique design of the STEERTEK™ NXT axle contributes to a lightweight design

### Superior Ride Quality

- Large volume air springs provide a softer, more comfortable ride

### Superior Maneuverability


- Up to 35 degrees of wheel cut for tight spaces such as job sites and city streets

### Outstanding Stability

- Box-shaped cross-section is more rigid than traditional I-beam axles

### Multiple Configuration Options

- Available in single or twin steer and trailing- or leading-arm configurations

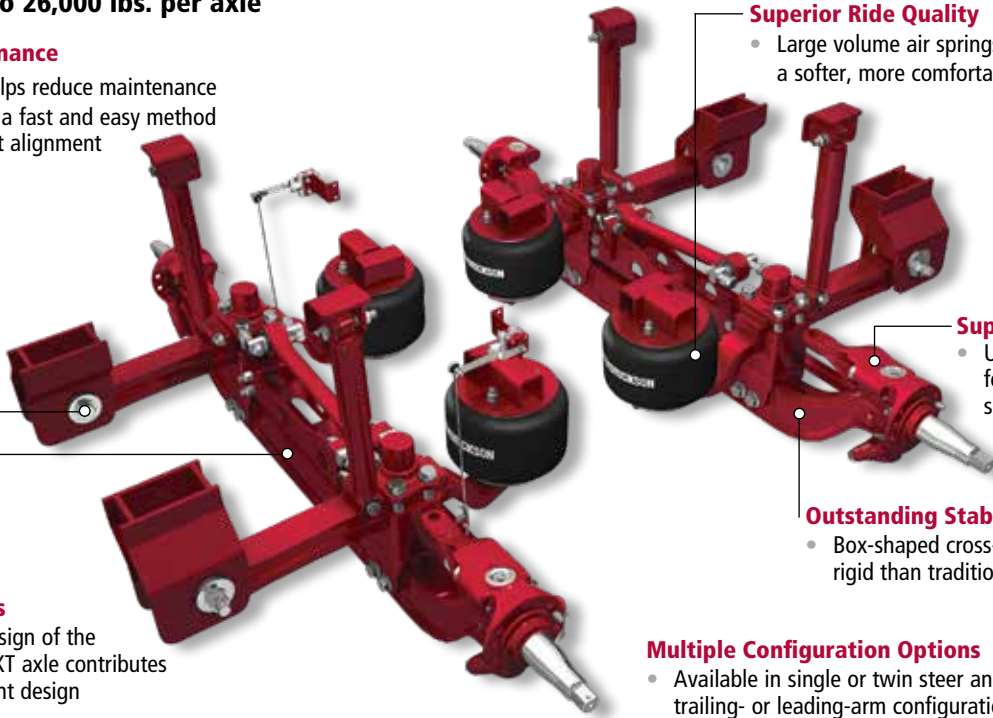

## ROADMAX™ for Truck Crane Applications

Capacities up to 60,000 lbs. per tandem

### Exceptional Stability and Handling


- Front portion of leaf springs and axle form box-shaped geometry for additional stability and handling
- Wide stance air springs provide increased roll stability and predictable handling

### Reduced Maintenance

- QUIK-ALIGN® helps reduce maintenance time by offering a fast and easy method to adjust and set alignment without shims
- Eliminates the need for torque rods for lower maintenance

### Superior Ride Quality

- Shock absorbers are tuned for optimum damping characteristics to provide exceptional driving comfort
- Air springs adjust to changing load conditions to deliver superb ride quality
- Extended-length main support member generates lower spring rate for optimized roll stiffness, providing a more comfortable and compliant ride

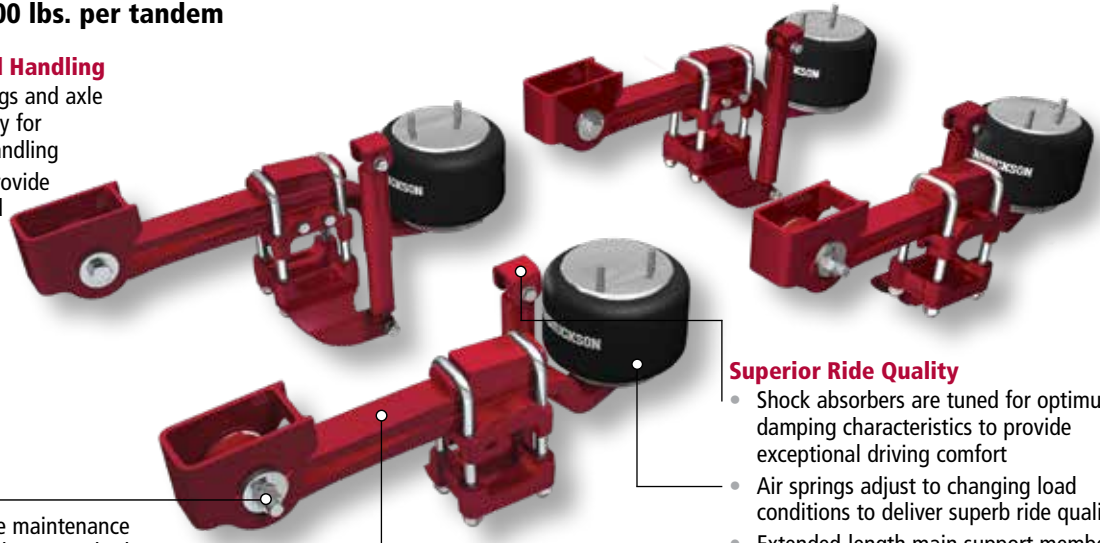

*Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.*

*All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration. Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.*

Call Hendrickson at **630.910.2800** or **855.RIDERED (743.3733)** for additional information.



**TRUCK COMMERCIAL VEHICLE SYSTEMS**  
800 South Frontage Road  
Woodridge, IL 60517-4904 USA  
855.RIDERED (743.3733)  
630.910.2800 • Fax 630.910.2899

[www.hendrickson-intl.com](http://www.hendrickson-intl.com)

45745-501 04-19

© 2019 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

Printed in United States of America